

## SR408 Conventional Fire Siren

### SPECIFICATIONS

Operating Voltage	: 16 to 30 VDC
Operating Humidity Range	: 10% to 93% Relative Humidity, Non-condensing
Sound Pressure Level	: 92 dB @1mt
Operating Temperature Range	: -10°C to 50°C
Height	: 65 mm
Diameter	: 103 mm
Weight	: 140 grams

### GENERAL DESCRIPTION

The SR408 conventional fire siren is used in conventional and addressed fire system, for reporting fires or emergency, audible warning. It is connected via an extra cable on the addressable systems. Compatible with DD-T and SVU-T base.

### INSTALLATION



SR408 Fire Siren consists of two main parts: a base and a sounder head. The device head is fixed on the base by the means of bayonet joints. When the siren head is placed on the base, make sure that the bench mark stands about 20mm before the respective bench mark on the base; then rotate clockwise to fix. The bench marks should fully coincide. The contacting plates are fixed to the base. The connection between the incoming wires and the contact plates is made by the provided screw terminals.

### WIRING

The wiring should be done as shown in figure 1. Proper wire gauges should be used. The installation wires should be color-coded to limit wiring mistakes and ease system troubleshooting. Improper connections will prevent a system from responding properly in the event of a fire. Remove power from the power line before installing sirens.

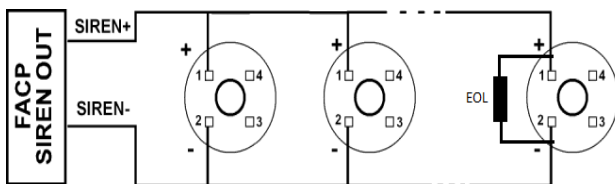


Figure -1-

## **TWO-YEAR LIMITED WARRANTY**

---

We warrant its enclosed smoke detector to be free from defects in materials and workmanship under normal use and service for a period of three years from date of manufacture. We make no other express warranty for this smoke detector. No agent, representative, dealer, or employee of the Company has the authority to increase or alter the obligations or limitations of this Warranty. The Company's obligation of this Warranty shall be limited to the repair or replacement of any part of the smoke detector which is found to be defective in materials or workmanship under normal use and service during the two year period commencing with the date of manufacture. After calling Code Security's technical support number for a Return Authorization number, send defective units postage prepaid to Code Security local representative office. Please include a note describing the malfunction and suspected cause of failure. The Company shall not be obligated to repair or replace units which are found to be defective because of damage, unreasonable use, modifications, or alterations occurring after the date of manufacture. In no case shall the Company be liable for any consequential or incidental damages for breach of this or any other Warranty, expressed or implied whatsoever, even if the loss or damage is caused by the Company's negligence or fault. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

---

[www.codesectech.com](http://www.codesectech.com)