SS-1 (1 : 25)

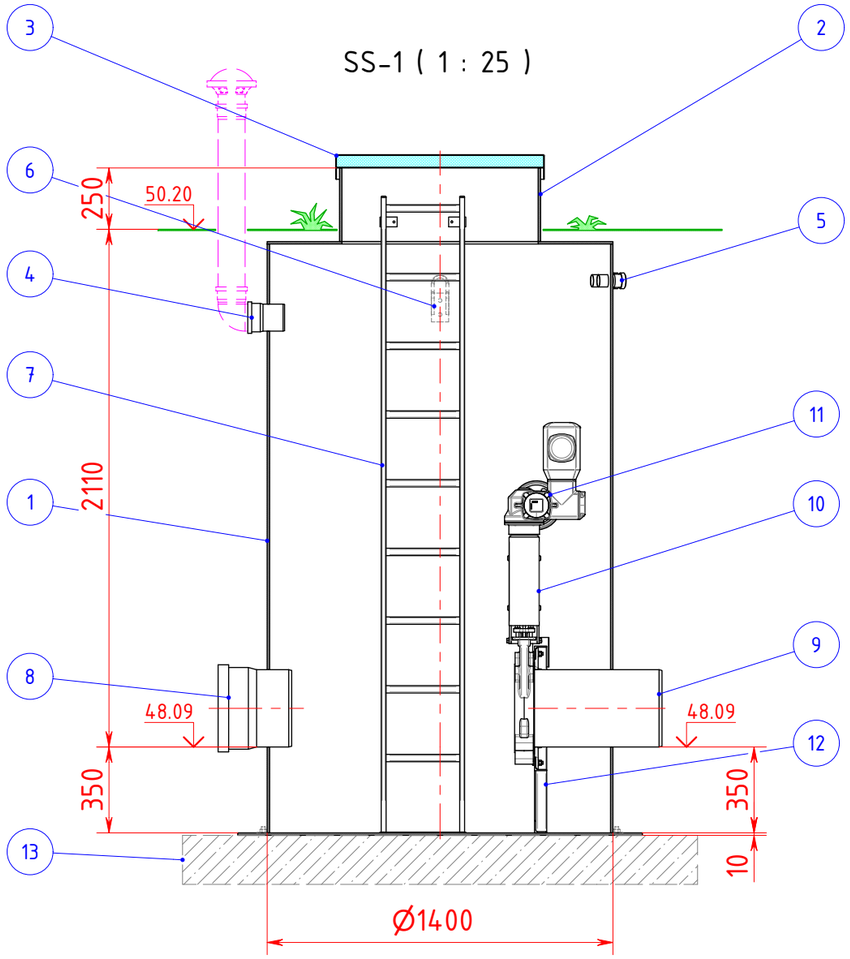

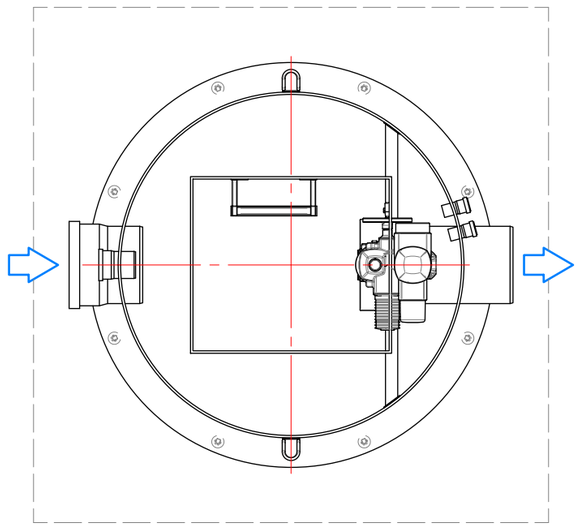

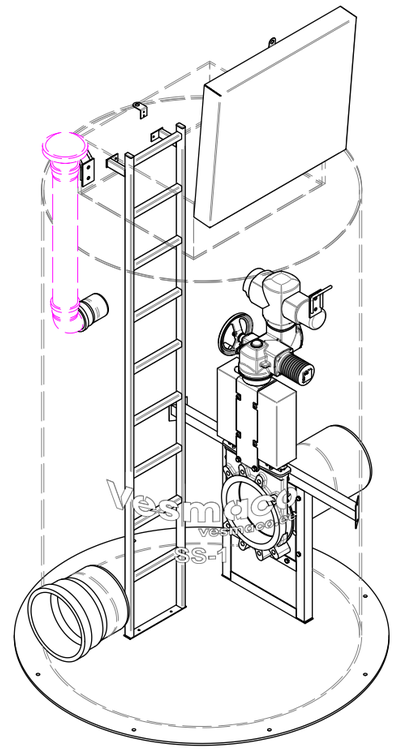

1	Sademevee reguleerimiskaev / Stormwater shutter manhole RK-300		ø1400×2470+250 mm	1
	Klaasplastik (GRP) "Vesmaco Composite", pH 3-10, temperatuuri taluvus max 40°C / Glass-reinforce plastic (GRP) "Vesmaco Composite", pH 3-10, heat resistance max 40°C			
	Maht / Total volume		3600 l	
2	Hoolduskaev / Manhole	GRP	700×800 mm	1
3	Luuk / Lockable cover with thermal insulation	Aluminium + PUR	700×800 mm	1
4	Ventilatsiooni ühendus / Ventilation pipe	PVC	D110	1
5	Kaabli sisseviik / Cable aperture	PVC	D50	2
6	Tõsteaas / Lifting loops	EN 1.1121	Tsingitud / Galvinised	2
7	Redel / Ladder, non-slip rugs	EN 1.4307/304L	h= 2-2,5 m	1
8	Sissevoolutoru / Inlet pipe	PVC	D315 SN8	1
9	Väljavoolutoru / Outlet pipe	PVC	D315 SN8	1
10	Nugasiiber spindlipikendusega / Knife gate with extension	Cast iron	DN300 PN10	1
11	El. ajam / Electric drive	AUMA SA 07.6 NRS 380V/50Hz/3ph +AM 01.1		1
12	Raam / Knife gate support	GRP + EN 1.4307		1
13	Alusplaat / Anchore plate			(1)

Technical reference Jevgeni Toom	Created by Maksim Bozhko	Approved by Jevgeni Toom		
Title, Supplementary title Sademevee reguleerimiskaev / Stormwater shutter manhole RK-300 (SS-1)			A3	1 : 25
Document type General assembly drawing	Document status Customer drawing	Date of issue 01.10.2023	Rev. C	1/1

Vesmaco

Vesmaco OÜ
Katusepapi 6, 11412 Tallinn, Estonia
www.vesmaco.ee

23051611-RK-300-D1400-H2470+250

Customer
03 TECHNOLOGY OÜ

Project
Ravila tn. 77, Tartu

Vesmaco OÜ reserves the right to make unilaterally changes.