





MICRO MARTIN

vizulo

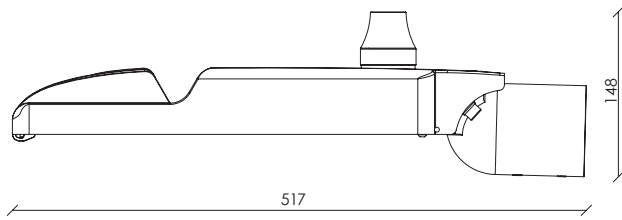



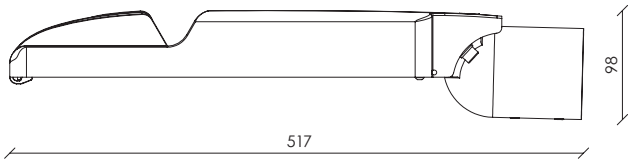

Technical information


V 220 - 240	Chromaticity tolerance (initial MacAdam): 5
Hz 50 - 60	Power factor: up to 0,97
W* 5 - 70	Die-cast aluminum
lm 470 - 8600	Body color: Silver - RAL9006 / Asphalt - DB 703
lm/W 90 - 132	Console: \varnothing 40 - 60 mm
K 3000/4000	Dimensions: 517 x 170 x 98 mm
CRI >70	DALI, Midnight dimming, 1-10V
°C -40 to +50	Radio frequency
	Surge protection: 6 kV / seperate built-in 10 kV
	100 000 h (L95B10) at $t_a = 25^{\circ}\text{C}$
	Warranty 5 years



Technical parameters for final product can differ from typical data by 7% due to special conditions of LED manufacturing processes.


* Preliminary and will change according to testing results. Data may not be used for tenders or purchasing.

Accessories



Adjustable Console $\pm 90^{\circ}$


Spigot size 60 mm
Art. 70055017



Adjustable Console $\pm 90^{\circ}$

Spigot size 76 mm
Art. 70055018

| Model name principles

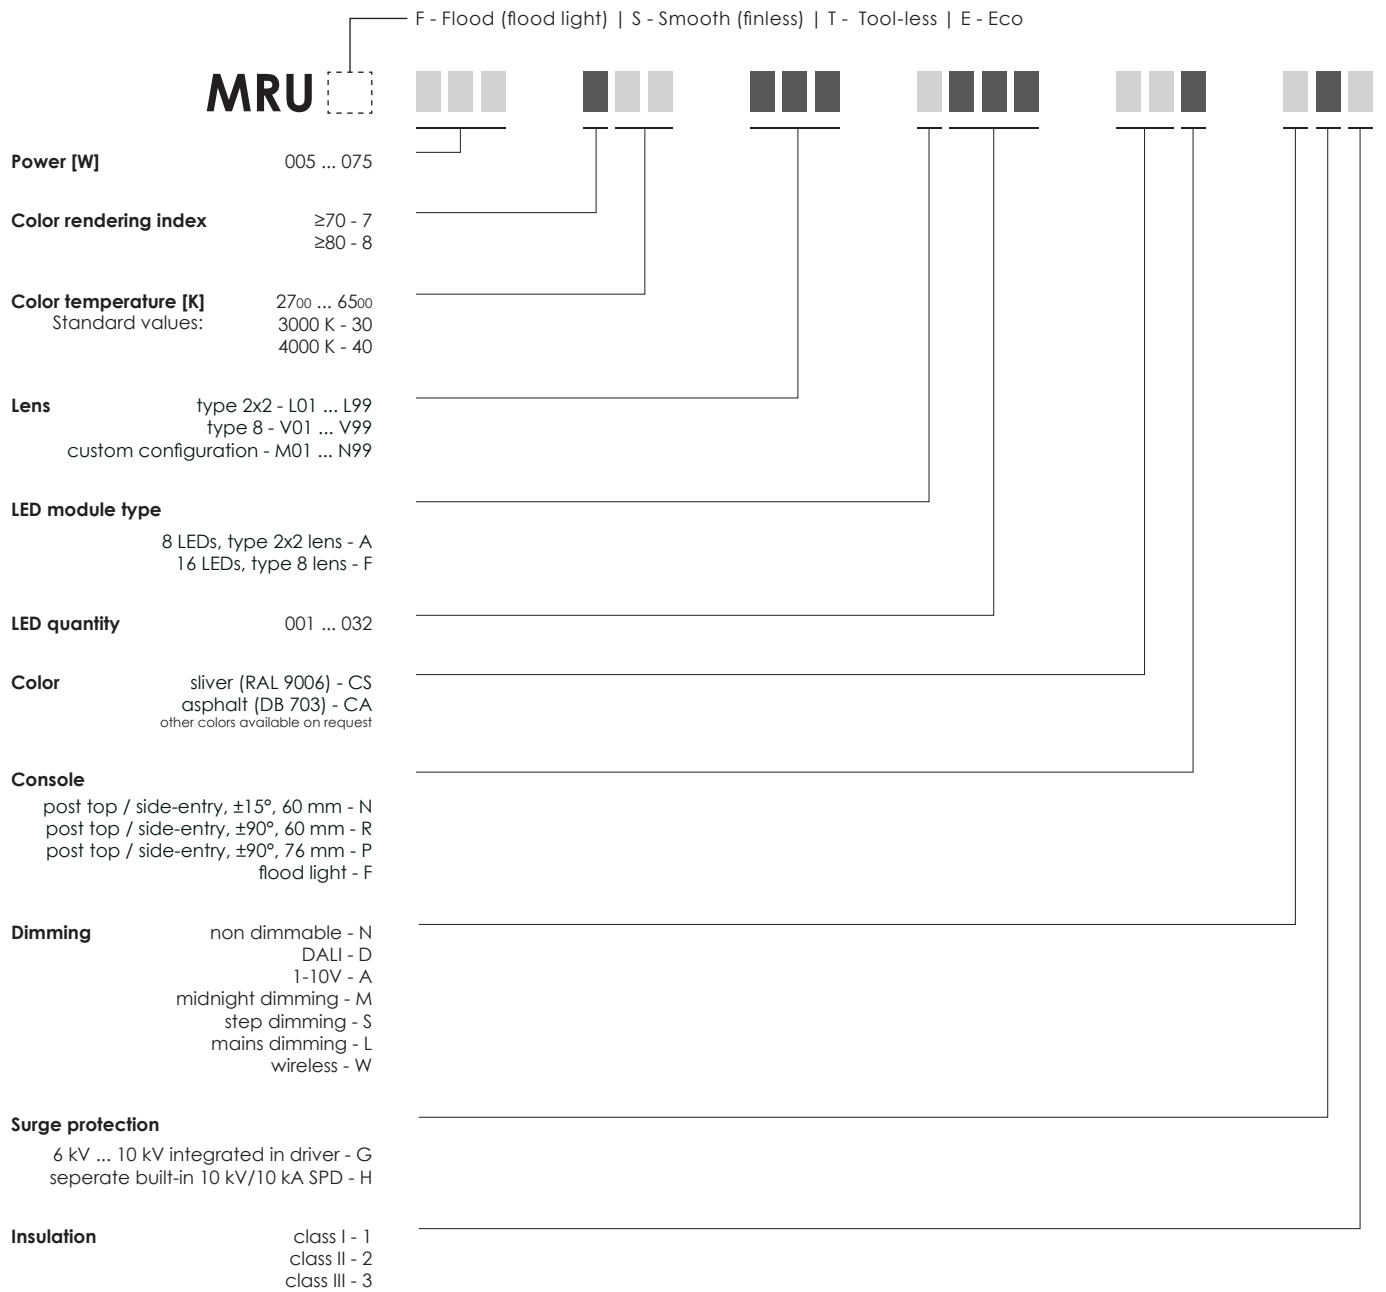

EXAMPLE MRUE 005 730 L99 A001 CSN NG1