

# VIZULO

MICRO MARTIN Tool-less Eco  
MRUTE 025 730 L22 AA008 CJN NG1



CE   RoHS

Color

RAL 7035

Electrical

<b>Input power</b>	25 W
<b>Input voltage</b>	220 - 240 V
<b>Frequency</b>	50 - 60 Hz
<b>Power factor</b>	0.98

Optical

<b>Optic name</b>	L22
<b>Optic type</b>	TYPE-III
<b>Luminous flux</b>	3153 lm $\pm$ 7%
<b>Luminous efficacy</b>	126 lm/W
<b>Performance temperature Tq</b>	+25 °C
<b>Color rendering index</b>	>70
<b>Color temperature</b>	3000 K
<b>Color tolerance</b>	5 SDCM
<b>ULOR</b>	0
<b>LED quantity</b>	8

Lifetime

<b>Lumen depreciation</b>	L90 after 100 000 h
<b>Warranty</b>	5 years
<b>Ambient temperature range</b>	-40 ... +50 °C

Protection

<b>Protection class</b>	Class I
<b>Surge protection L-N</b>	At least 6 kV
<b>Surge protection L/N-PE</b>	At least 6 kV
<b>Ingress protection</b>	IP66
<b>Impact resistance</b>	IK08
<b>Increased corrosion resistance</b>	Powder coating

Housing

<b>Body material</b>	Die-cast aluminium
<b>Cover material</b>	Flat tempered glass
<b>Optic material</b>	PMMA
<b>Color</b>	RAL 7035 (light grey)
<b>Dimensions</b>	536 x 170 x 94 mm
<b>Max wind load area SCd</b>	0.04 m <sup>2</sup>
<b>Mounting</b>	Post top / side-entry, 60 mm
<b>LED module replaceability</b>	Replaceable by a professional
<b>Driver replaceability</b>	Replaceable by a professional
<b>Accessibility of electronic components</b>	Tool-less


Controls

<b>Dimming</b>	No dimming
----------------	------------

Approvals


<b>CE</b>	Yes
<b>ENEC</b>	Yes
<b>ENEC+</b>	Yes
<b>RoHS</b>	Yes

Light distribution

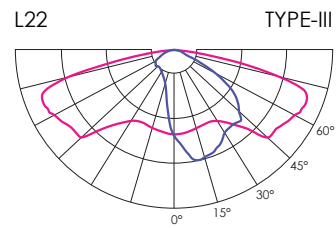

Dimensions

A x B x C (mm): 536 x 170 x 94

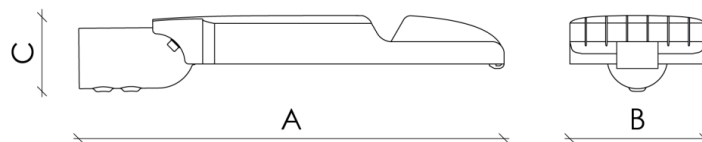

Product images

