

**Riigitee nr 11390Tallinn-Rannamõisa-Kloogaranna (km
27,25-27,63)**

Preliminary remarks

Notes on planning:

The energy consumption quantities do not take into account light scenes and their dimming levels.

Content

Cover page	1
Preliminary remarks	2
Content	3
Description	4
Luminaire list	5


Product data sheets

Philips - BGP282 T25 1 xLED65-4S/730 DN10 (1x LED65-4S/730)	6
---	---

samm 42m , 42,5W , 3000K · Alternative 5

Description	7
Summary (according to EN 13201:2015)	8
Sõidutee 1 (M5)	11

Glossary	17
----------------	----

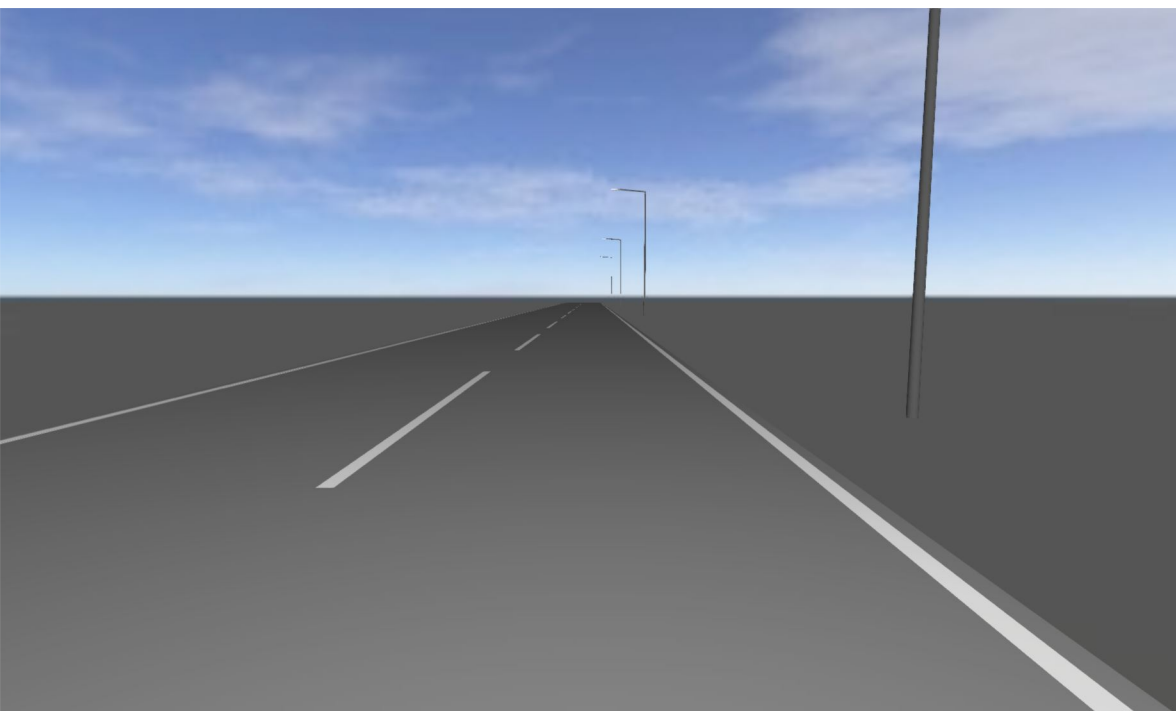

Description

Luminaire list

Φ_{total} 23464 lm	P_{total} 170.0 W	Luminous efficacy 138.0 lm/W
-----------------------------------	-------------------------------	---------------------------------


pcs.	Manufacturer	Article No.	Article name	P	Φ	Luminous efficacy
4	Philips		BGP282 T25 1 xLED65-4S/730 DN10	42.5 W	5866 lm	138.0 lm/W

Product data sheet

Philips - BGP282 T25 1 xLED65-4S/730 DN10




P	42.5 W
Φ_{Lamp}	6600 lm
$\Phi_{\text{Luminaire}}$	5866 lm
η	88.87 %
Luminous efficacy	138.0 lm/W
CCT	3000 K
CRI	100

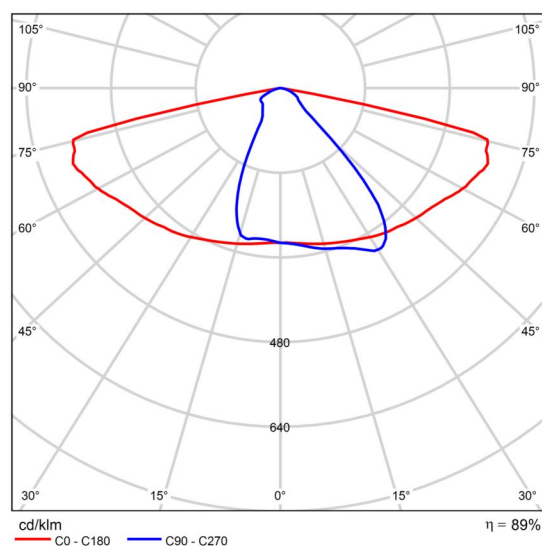

Polar LDC

The easy way to ledify your road lighting – UniStreet gen2 Designed for large-scale ledification projects, the UniStreet gen2 is the ideal 1:1 luminaire replacement for municipalities. Thanks to its high efficiency and low initial cost, the UniStreet gen2 luminaire enables a fast payback and significant savings in terms of energy consumption within a short period of time. The ease of installation and maintenance is enabled by the Philips Service tag and the Philips SR (System Ready) socket makes it future-ready and you can pair this luminaire with lighting control and software applications such as Interact City.

Available with a number of different optics and lumen packages that can even be tuned further to fit exact project requirements, UniStreet gen2 is a true point-to-point replacement solution for conventional light sources. The compact luminaire, using high-quality materials is also easy to dismantle and recycle at the end of its lifetime.

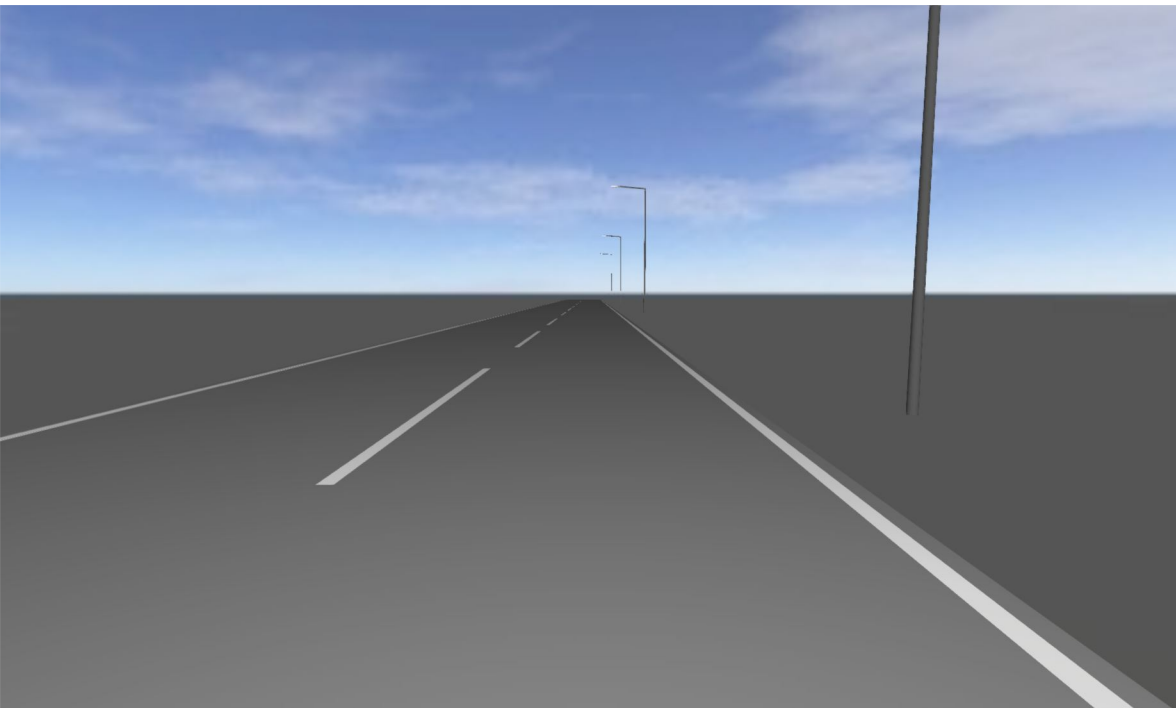


samm 42m , 42,5W , 3000K

Description


samm 42m , 42,5W , 3000K

Summary (according to EN 13201:2015)

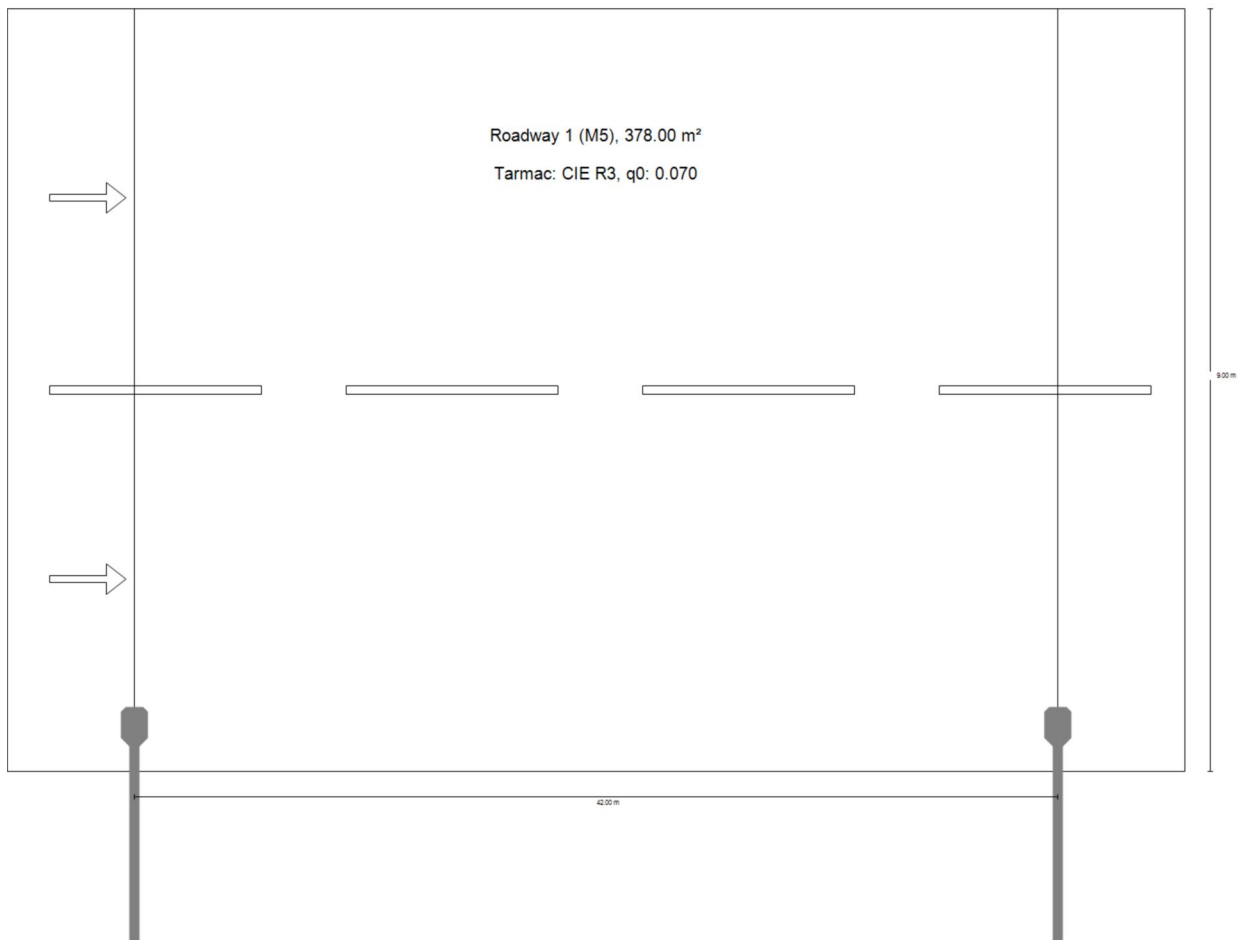

samm 42m , 42,5W , 3000K


Summary (according to EN 13201:2015)



Manufacturer	Philips	P	42.5 W
Article name	BGP282 T25 1 xLED65-4S/730 DN10	Φ_{Lamp}	6600 lm
		$\Phi_{\text{Luminaire}}$	5866 lm
Fitting	1x LED65-4S/730	η	88.87 %

BGP282 T25 1 xLED65-4S/730 DN10 (single side bottom)

Pole distance	42.000 m
(1) Light spot height	10.000 m
(2) Light point overhang	0.500 m
(3) Boom inclination	5.0°
(4) Boom length	2.500 m
Annual operating hours	4000 h: 100.0 %, 42.5 W
Consumption	1020.0 W/km
ULR / ULOR	0.00 / 0.00
Max. luminous intensities	≥ 70°: 625 cd/klm
Any direction forming the specified angle from the downward vertical, with the luminaire installed for use.	≥ 80°: 221 cd/klm ≥ 90°: 1.54 cd/klm
Luminous intensity class	-
The luminous intensity values in [cd/klm] for calculation of the luminous intensity class refer to the luminaire luminous flux according to EN 13201:2015.	
Glare index class	D.6



samm 42m , 42,5W , 3000K

Summary (according to EN 13201:2015)

Results for valuation fields

	Symbol	Calculated	Target	Check
Sõidutee 1 (M5)	L_{av}	0.51 cd/m ²	≥ 0.50 cd/m ²	✓
	U_o	0.43	≥ 0.35	✓
	U_l	0.75	≥ 0.40	✓
	TI	10 %	≤ 15 %	✓
	R_{EI}	0.43	≥ 0.30	✓

A maintenance factor of 0.80 was used for calculating for the installation.

Results for energy efficiency indicators

	Symbol	Calculated	Consumption
samm 42m , 42,5W , 3000K	D_p	0.015 W/lx*m ²	-
BGP282 T25 1 xLED65-4S/730 DN10 (single side bottom)	D_e	0.4 kWh/m ² yr,	170.0 kWh/yr

samm 42m , 42,5W , 3000K

Sõidutee 1 (M5)

Results for valuation field


	Symbol	Calculated	Target	Check
Sõidutee 1 (M5)	L_{av}	0.51 cd/m ²	≥ 0.50 cd/m ²	✓
	U_o	0.43	≥ 0.35	✓
	U_l	0.75	≥ 0.40	✓
	TI	10 %	≤ 15 %	✓
	R_{EI}	0.43	≥ 0.30	✓

Results for observer


	Symbol	Calculated	Target	Check
Observer 1 Position: -60.000 m, 2.250 m, 1.500 m	L_{av}	0.51 cd/m ²	≥ 0.50 cd/m ²	✓
	U_o	0.43	≥ 0.35	✓
	U_l	0.84	≥ 0.40	✓
	TI	10 %	≤ 15 %	✓
Observer 2 Position: -60.000 m, 6.750 m, 1.500 m	L_{av}	0.56 cd/m ²	≥ 0.50 cd/m ²	✓
	U_o	0.45	≥ 0.35	✓
	U_l	0.75	≥ 0.40	✓
	TI	7 %	≤ 15 %	✓

samm 42m , 42,5W , 3000K

Sõidutee 1 (M5)

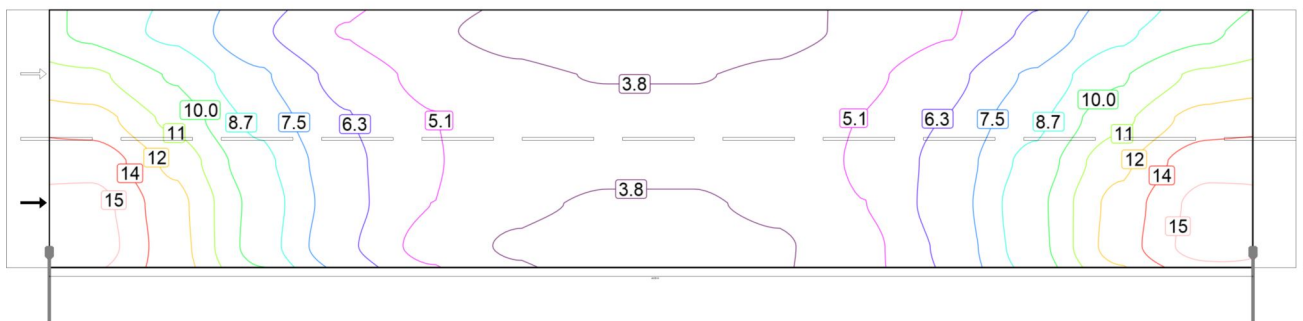

Maintenance value, horizontal illuminance [lx] (Iso-illuminance curves)

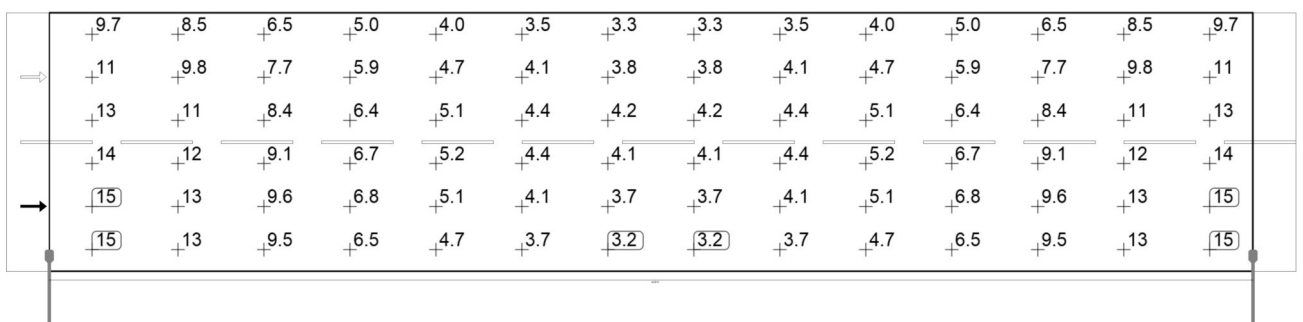

Maintenance value, horizontal illuminance [lx] (Value grid)


m	1.500	4.500	7.500	10.500	13.500	16.500	19.500	22.500	25.500	28.500	31.500	34.500	37.500	40.500
8.250	9.70	8.46	6.49	4.99	4.04	3.50	3.25	3.25	3.50	4.04	4.99	6.49	8.46	9.70
6.750	11.46	9.84	7.70	5.91	4.74	4.08	3.80	3.80	4.08	4.74	5.91	7.70	9.84	11.46
5.250	12.95	10.87	8.40	6.37	5.10	4.43	4.17	4.17	4.43	5.10	6.37	8.40	10.87	12.95
3.750	14.45	12.10	9.13	6.70	5.17	4.43	4.06	4.06	4.43	5.17	6.70	9.13	12.10	14.45
2.250	15.28	12.83	9.56	6.81	5.06	4.13	3.70	3.70	4.13	5.06	6.81	9.56	12.83	15.28
0.750	15.47	12.97	9.45	6.53	4.66	3.68	3.24	3.24	3.68	4.66	6.53	9.45	12.97	15.47

Maintenance value, horizontal illuminance [lx] (Value chart)

	E_{av}	E_{min}	E_{max}	g_1	g_2
Maintenance value, horizontal illuminance	7.37 lx	3.24 lx	15.5 lx	0.44	0.21

samm 42m , 42,5W , 3000K

Sõidutee 1 (M5)

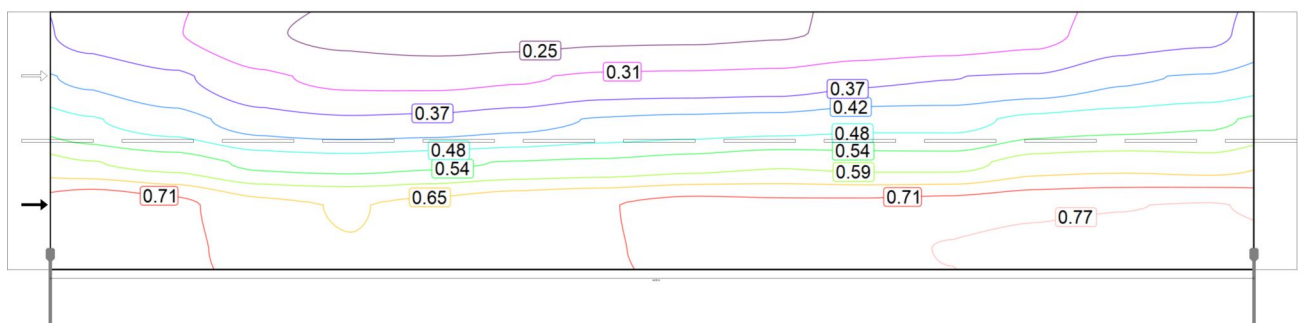

Observer 1: Maintenance value, luminance with dry roadway [cd/m^2] (Iso-illuminance curves)



Observer 1: Maintenance value, luminance with dry roadway [cd/m^2] (Value grid)


m	1.500	4.500	7.500	10.500	13.500	16.500	19.500	22.500	25.500	28.500	31.500	34.500	37.500	40.500
8.250	0.34	0.31	0.26	0.23	0.22	0.23	0.24	0.24	0.25	0.26	0.27	0.29	0.33	0.35
6.750	0.41	0.38	0.32	0.29	0.29	0.30	0.32	0.32	0.33	0.35	0.36	0.37	0.41	0.43
5.250	0.49	0.45	0.39	0.37	0.38	0.40	0.43	0.44	0.44	0.46	0.46	0.50	0.51	0.53
3.750	0.60	0.57	0.52	0.51	0.52	0.54	0.55	0.57	0.59	0.57	0.57	0.62	0.63	0.62
2.250	0.76	0.72	0.66	0.65	0.66	0.69	0.71	0.73	0.72	0.72	0.74	0.75	0.76	0.77
0.750	0.76	0.73	0.67	0.65	0.67	0.69	0.70	0.73	0.74	0.74	0.77	0.79	0.79	0.79

Observer 1: Maintenance value, luminance with dry roadway [cd/m^2] (Value chart)


	L_{av}	L_{min}	L_{max}	g_1	g_2
Observer 1: Maintenance value, luminance with dry roadway	0.51 cd/m^2	0.22 cd/m^2	0.79 cd/m^2	0.43	0.28

samm 42m , 42,5W , 3000K

Sõidutee 1 (M5)

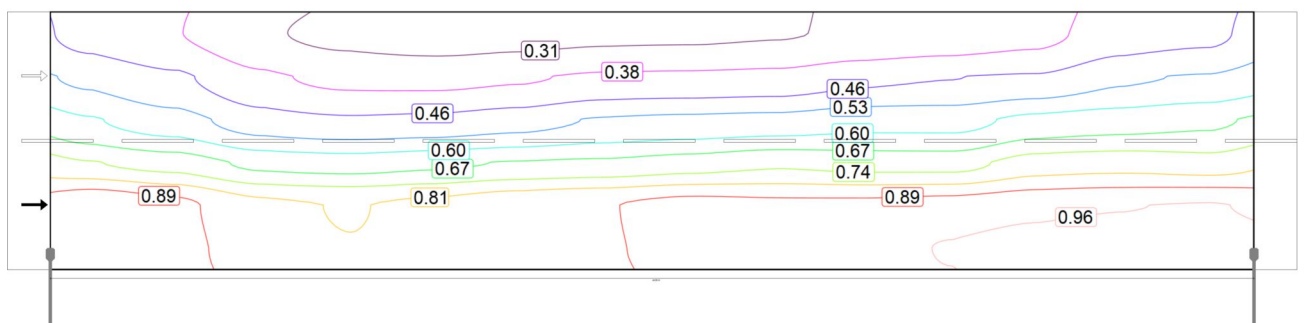

Observer 1: Luminance with new installation [cd/m^2] (Iso-illuminance curves)

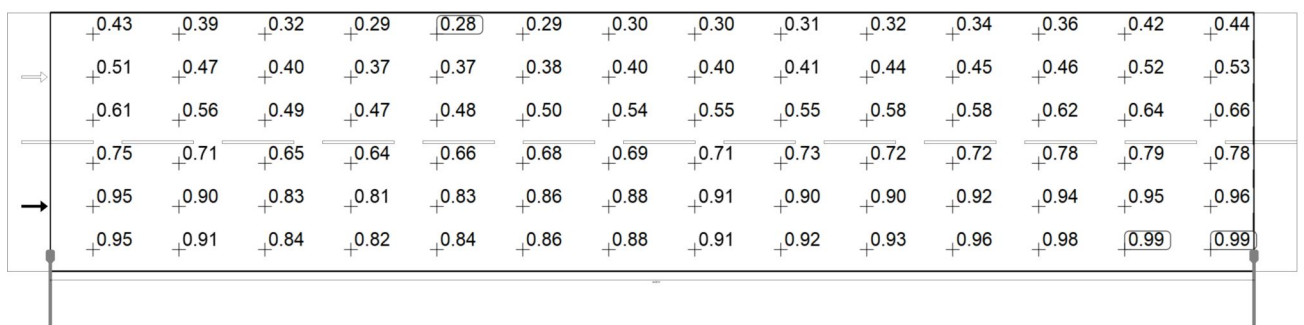

Observer 1: Luminance with new installation [cd/m^2] (Value grid)


m	1.500	4.500	7.500	10.500	13.500	16.500	19.500	22.500	25.500	28.500	31.500	34.500	37.500	40.500
8.250	0.43	0.39	0.32	0.29	0.28	0.29	0.30	0.30	0.31	0.32	0.34	0.36	0.42	0.44
6.750	0.51	0.47	0.40	0.37	0.37	0.38	0.40	0.40	0.41	0.44	0.45	0.46	0.52	0.53
5.250	0.61	0.56	0.49	0.47	0.48	0.50	0.54	0.55	0.55	0.58	0.58	0.62	0.64	0.66
3.750	0.75	0.71	0.65	0.64	0.66	0.68	0.69	0.71	0.73	0.72	0.72	0.78	0.79	0.78
2.250	0.95	0.90	0.83	0.81	0.83	0.86	0.88	0.91	0.90	0.90	0.92	0.94	0.95	0.96
0.750	0.95	0.91	0.84	0.82	0.84	0.86	0.88	0.91	0.92	0.93	0.96	0.98	0.99	0.99

Observer 1: Luminance with new installation [cd/m^2] (Value chart)


	L_{av}	L_{min}	L_{max}	g_1	g_2
Observer 1: Luminance with new installation	0.64 cd/m^2	0.28 cd/m^2	0.99 cd/m^2	0.43	0.28

samm 42m , 42,5W , 3000K

Sõidutee 1 (M5)

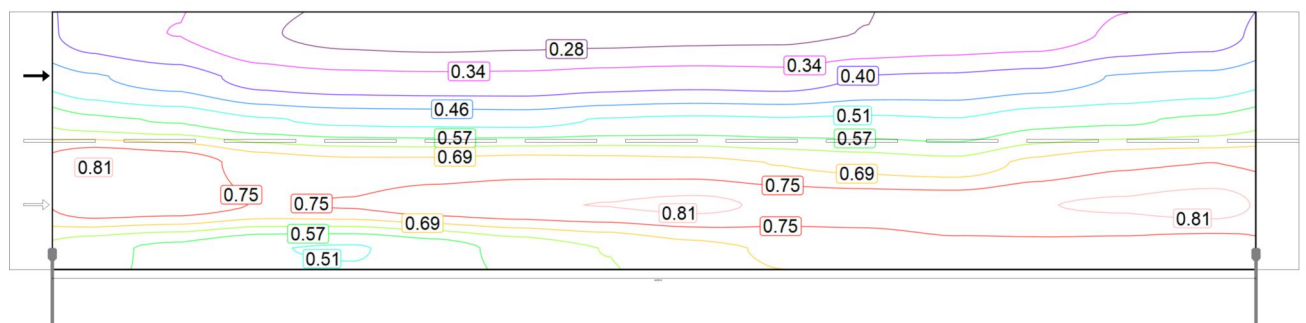

Observer 2: Maintenance value, luminance with dry roadway [cd/m^2] (Iso-illuminance curves)

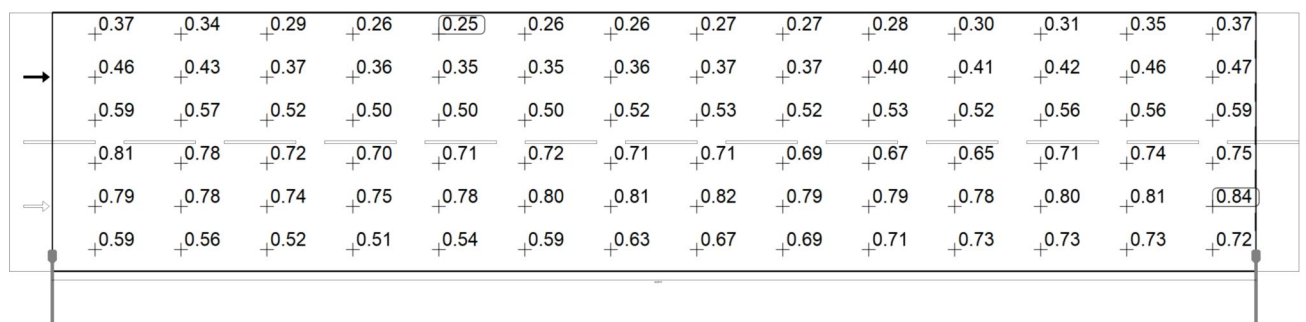

Observer 2: Maintenance value, luminance with dry roadway [cd/m^2] (Value grid)


m	1.500	4.500	7.500	10.500	13.500	16.500	19.500	22.500	25.500	28.500	31.500	34.500	37.500	40.500
8.250	0.37	0.34	0.29	0.26	0.25	0.26	0.26	0.27	0.27	0.28	0.30	0.31	0.35	0.37
6.750	0.46	0.43	0.37	0.36	0.35	0.35	0.36	0.37	0.37	0.40	0.41	0.42	0.46	0.47
5.250	0.59	0.57	0.52	0.50	0.50	0.50	0.52	0.53	0.52	0.53	0.52	0.56	0.56	0.59
3.750	0.81	0.78	0.72	0.70	0.71	0.72	0.71	0.71	0.69	0.67	0.65	0.71	0.74	0.75
2.250	0.79	0.78	0.74	0.75	0.78	0.80	0.81	0.82	0.79	0.79	0.78	0.80	0.81	0.84
0.750	0.59	0.56	0.52	0.51	0.54	0.59	0.63	0.67	0.69	0.71	0.73	0.73	0.73	0.72

Observer 2: Maintenance value, luminance with dry roadway [cd/m^2] (Value chart)


	L_{av}	L_{min}	L_{max}	g_1	g_2
Observer 2: Maintenance value, luminance with dry roadway	0.56 cd/m^2	0.25 cd/m^2	0.84 cd/m^2	0.45	0.30

samm 42m , 42,5W , 3000K

Sõidutee 1 (M5)

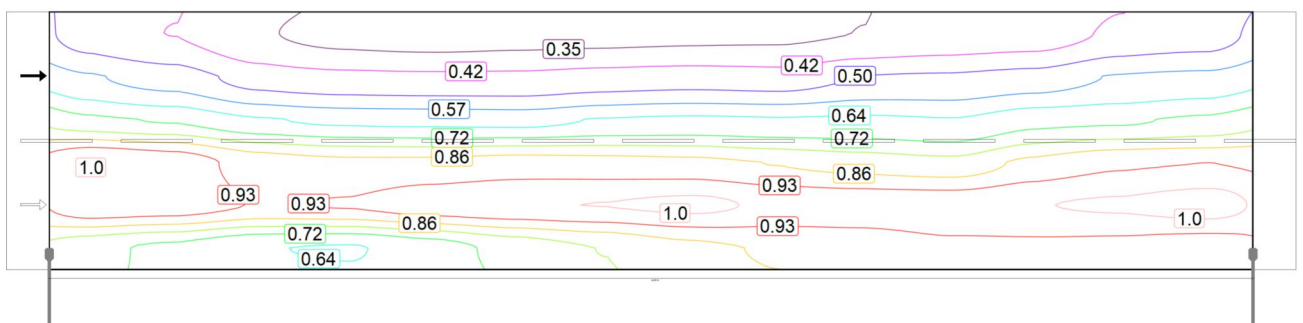

Observer 2: Luminance with new installation [cd/m^2] (Iso-illuminance curves)

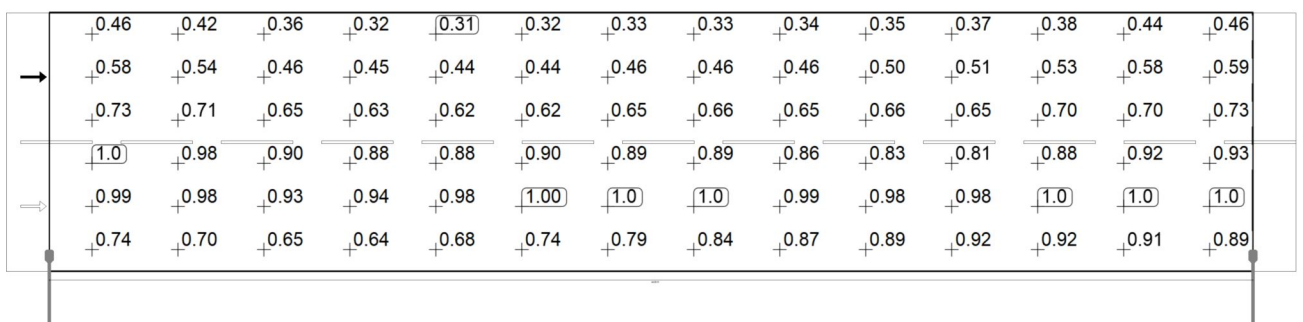

Observer 2: Luminance with new installation [cd/m^2] (Value grid)

m	1.500	4.500	7.500	10.500	13.500	16.500	19.500	22.500	25.500	28.500	31.500	34.500	37.500	40.500
8.250	0.46	0.42	0.36	0.32	0.31	0.32	0.33	0.33	0.34	0.35	0.37	0.38	0.44	0.46
6.750	0.58	0.54	0.46	0.45	0.44	0.44	0.46	0.46	0.46	0.50	0.51	0.53	0.58	0.59
5.250	0.73	0.71	0.65	0.63	0.62	0.62	0.65	0.66	0.65	0.66	0.65	0.70	0.70	0.73
3.750	1.01	0.98	0.90	0.88	0.88	0.90	0.89	0.89	0.86	0.83	0.81	0.88	0.92	0.93
2.250	0.99	0.98	0.93	0.94	0.98	1.00	1.01	1.03	0.99	0.98	0.98	1.00	1.02	1.04
0.750	0.74	0.70	0.65	0.64	0.68	0.74	0.79	0.84	0.87	0.89	0.92	0.92	0.91	0.89

Observer 2: Luminance with new installation [cd/m^2] (Value chart)

	L_{av}	L_{min}	L_{max}	g_1	g_2
Observer 2: Luminance with new installation	0.70 cd/m^2	0.31 cd/m^2	1.04 cd/m^2	0.45	0.30

Glossary

A

A	Formula symbol for a surface in the geometry
---	--

B

Background area	The background area borders the direct ambient area according to DIN EN 12464-1 and reaches up to the borders of the room. In larger rooms, the background area is at least 3 m wide. It is located horizontally at floor level.
-----------------	--

C

CCT	<p>(Engl. correlated colour temperature)</p> <p>Body temperature of a thermal radiator which serves to describe its light colour. Unit: Kelvin [K]. The lesser the numerical value the redder; the greater the numerical value the bluer the light colour. The colour temperature of gas-discharge lamps and semi-conductors are termed "correlated colour temperature" in contrast to the colour temperature of thermal radiators.</p> <p>Allocation of the light colours to the colour temperature ranges acc. to EN 12464-1:</p> <p>Light colour - colour temperature [K] warm white (ww) < 3,300 K neutral white (nw) ≥ 3,300 – 5,300 K daylight white (dw) > 5,300 K</p>
-----	--

Clearance height	The designation for the distance between upper edge of the floor and bottom edge of the ceiling (in the completely furnished status of room).
------------------	---

CRI	<p>(Engl. colour rendering index)</p> <p>Designation for the colour rendering index of a luminaire or a lamp acc. to DIN 6169: 1976 or CIE 13.3: 1995.</p> <p>The general colour rendering index Ra (or CRI) is a dimensionless figure that describes the quality of a white light source in regards to its similarity with the remission spectra of defined 8 test colours (see DIN 6169 or CIE 1974) to a reference light source.</p>
-----	---

D

Daylight factor	<p>Ratio of the illuminance achieved solely by daylight incidence at a point in the inside to the horizontal illuminance in the outer area under an unobstructed sky.</p> <p>Formula symbol: D (Engl. daylight factor) Unit: %</p>
-----------------	---

Glossary

Daylight quotient effective area	A calculation surface within which the daylight quotient is calculated.
E	
Eta (η)	<p>(light output ratio)</p> <p>The light output ratio describes what percentage of the luminous flux of a free radiating lamp (or LED module) is emitted by the luminaire when installed.</p> <p>Unit: %</p>
G	
g_1	<p>Often also U_o (Engl. overall uniformity)</p> <p>Designates the overall uniformity of the illuminance on a surface. It is the quotient from E_{min} to \bar{E} and is required, for instance, in standards for illumination of workstations.</p>
g_2	<p>Actually it designates the "non-uniformity" of the illuminance on a surface. It is the quotient of E_{min} to E_{max} and is generally only relevant for certifying the emergency lighting acc. to EN 1838.</p>
I	
Illuminance	<p>Describes the ratio of the luminous flux that strikes a certain surface to the size of this surface ($lm/m^2 = lx$). The illuminance is not tied to an object surface. It can be determined anywhere in space (inside or outside). The illuminance is not a product feature because it is a recipient value. Luxometers are used for measuring.</p> <p>Unit: Lux</p> <p>Abbreviation: lx</p> <p>Formula symbol: E</p>
Illuminance, adaptive	For the determining of the middle adaptive illuminance on a surface, this is rastered "adaptively". In the area of large illuminance differences within the surface, the raster is subdivided finer; within lesser differences, a rougher classification is made.
Illuminance, horizontal	Illuminance that is calculated or measured on a horizontal (level) surface (this can be for example a table top or the floor). The horizontal illuminance is usually identified by the formula letter E_h .
Illuminance, perpendicular	Illuminance that is calculated or measured plumb-vertical to a surface. This needs to be taken into account for tilted surfaces. If the surface is horizontal or vertical, then there is no difference between the perpendicular and the horizontal or vertical illuminance.

Glossary

Illuminance, vertical	<p>Illuminance that is calculated or measured on a vertical surface (this can be for example the front of some shelves). The vertical illuminance is usually identified by the formula letter E_v.</p>
L	
LENI	<p>(Engl. lighting energy numeric indicator) Lighting energy numeric indicator acc. to EN 15193</p> <p>Unit: kWh/m² year</p>
LLMF	<p>(Engl. lamp lumen maintenance factor)/acc. to CIE 97: 2005 Lamp flux maintenance factor that takes the luminous flux reduction into account of a luminaire or an LED module in the course of the operating time. The lamp flux maintenance factor is specified as a decimal digit and can have a maximum value of 1 (no luminous flux reduction existing).</p>
LMF	<p>(Engl. luminaire maintenance factor)/acc. to CIE 97: 2005 Luminaire maintenance factor that takes the soiling into account of the luminaire in the course of the operating time. The luminaire maintenance factor is specified as a decimal digit and can have a maximum value of 1 (no soiling existing).</p>
LSF	<p>(Engl. lamp survival factor)/acc. to CIE 97: 2005 Lamp survival factor that takes the total failure into account of a luminaire in the course of the operating time. The lamp survival factor is specified as a decimal digit and can have a maximum value of 1 (no failures existing within the time concerned or prompt replacement after the failure).</p>
Luminance	<p>Dimension for the "brightness impression" that the human eye has of a surface. The surface itself can emit light thereby or light striking it can be reflected (emitter value). It is the only photometric value that the human eye can perceive.</p> <p>Unit: Candela per square metre Abbreviation: cd/m² Formula symbol: L</p>
Luminous efficacy	<p>Ratio of the emitted luminous flux Φ [lm] to the absorbed electrical power P [W] Unit: lm/W.</p> <p>This ratio can be formed for the lamp or LED module (lamp or module light output), the lamp or module with control gear (system light output) and the complete luminaire (luminaire light output).</p>

Glossary

Luminous flux	<p>Dimension for the total light output that is emitted from one light source in all directions. It is thus an "emitter value" that specifies the entire emitting output. The luminous flux of a light source can only be determined in a laboratory. A difference is made between the lamp or LED module luminous flux and the luminaire luminous flux.</p> <p>Unit: Lumen Abbreviation: lm Formula symbol: Φ</p>
Luminous intensity	<p>Describes the intensity of the light in a certain direction (emitter value). The luminous intensity is a matter of the luminous flux Φ that is emitted in a certain spherical angle Ω. The radiation characteristics of a light source are presented graphically in a light distribution curve (LDC). The luminous intensity is an SI base unit.</p> <p>Unit: Candela Abbreviation: cd Formula symbol: I</p>
M	
Maintenance factor	See MF
MF	<p>(Engl. maintenance factor)/acc. to CIE 97: 2005</p> <p>Maintenance factor as decimal number between 0 and 1 that describes the ratio of the new value of a photometric planning parameter (e.g. of the illuminance) to a maintenance value after a certain time. The maintenance factor takes into account the soiling of luminaires and rooms as well as the luminous flux reduction and the failure of light sources.</p> <p>The maintenance factor is taken into account either overall or determined in detail acc. to CIE 97: 2005 by the formula $RMF \times LMF \times LLMF \times LSF$.</p>
P	
P	<p>(Engl. power) Electric power consumption</p> <p>Unit: watt Abbreviation: W</p>
R	
Reflection factor	<p>The reflection factor of a surface describes how much of the striking light is reflected back. The reflection factor is defined by the colour of the surface.</p>

Glossary

RMF	(Engl. room maintenance factor)/acc. to CIE 97: 2005 Room maintenance factor that takes the soiling into account of the space encompassing surfaces in the course of the operating time. The room maintenance factor is specified as a decimal digit and can have a maximum value of 1 (no soiling existing).
S	
Surrounding area	The ambient area directly borders the area of the visual task and should be planned with a width of at least 0.5 m according to DIN EN 12464-1. It is at the same height as the area of the visual task.
U	
UGR (max)	(unified glare rating) Measure for the psychological glare effect in interiors. In addition to luminaire luminance, the UGR value also depends on the position of the observer, the viewing direction and the ambient luminance. Among other things, EN 12464-1 specifies maximum permissible UGR values for various indoor workplaces.
UGR observer	Calculation point in the room, for the DIALux the UGR value is determined. The location and height of the calculation point should correspond to the typical observer position (position and eye level of the user).
V	
Visual task area	The area that is needed for carrying out the visual task in accordance with DIN EN 12464-1. The height corresponds with the height at which the visual task is executed.
W	
Wall zone	Circumferential area between working plane and walls which is not taken into account for the calculation.
Working plane	Virtual measuring or calculation surface at the height of the visual task that generally follows the room geometry. The working plane may also feature a wall zone.