


# Fire-teK WM 908 GGB

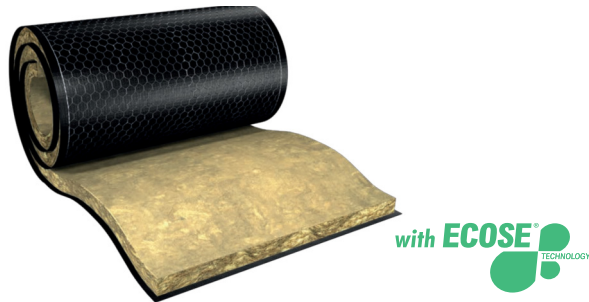

## Description

Fire-teK® WM 908 GGB is a high-temperature resistant Rock Mineral Wool wired mat covered with a **black re-inforced aluminium facing** that has been especially designed for fire protection in round ventilation ducts. Listed fire classes can be reached with mounting acc. to the installation manual.

## Performances

### Reaction to fire (EN 13501-1)

A1

### Fire classes

EI 60 at 80 mm thickness

EI 90/EI 120 at 100 mm thickness

### Apparent density (EN ISO 29470)

ca. 80 kg/m<sup>3</sup>

### Declaration of performance\*

<http://dopki.com/T4305EP CPR>

\* for detailed information on DoP please check the product label

## Application

Defined Fire-teK applications:

### > Circular air ducts

The product is recommended for fire insulation of defined Fire-teK applications within technical insulation for

### > passive fire protection of circular air ducts.



## Benefits

- > Fire resistance class EI60/EI120 with Fire-teK®WM 908 GGB, if installed as part of the system Fire-teK® DuctProtect 30-120 C SYSTEM
- > Quick and easy to use: no gluing at the joints necessary, no welding pins required
- > Matching black and desert look
- > Compact: thicknesses only 80 or 100 mm
- > No doubling layers at duct joints
- > Suitable for moulded parts
- > Excellent thermal and acoustic insulation
- > Eurofins Certification Indoor Air Comfort Standard
- > Strong outer packaging
- > Sustainable product labelling
- > Elastic, strong and flexible
- > Hydrophob
- > High temperature resistant
- > Non combustible
- > Age resistant
- > ECOSE® Technology

## Standards

Knauf Insulation products are produced according to four of the most important International Management Standards for sustainability ISO 9001 (Quality Management), ISO 14001 (Environmental Management), ISO 50001 (Energy Management) and ISO 45001 (Health and Safety Management), all certified by TÜV Nord.

## Certification, accreditations and industry standards



# Fire-teK WM 908 GGB



Description	Sign	Description/data								Unit	Standard
Thermal conductivity depending on temperature	θ	50	100	200	300	400	500	600	640	°C	EN 12667
	λ	0,040	0,046	0,064	0,088	0,122	0,163	0,212	0,239	W/(mK)	
Water soluble chloride ions (AS quality)	-	≤ 10								ppm	EN ISO 12624
Water absorption	Wp	≤ 1,0								kg/m <sup>2</sup>	EN ISO 29767
Water vapour diffusion resistance	μ	1								-	EN 14303
Melting point of fibres	θ	≥ 1000								°C	DIN 4102-17
Longitudinal air flow resistance	r	≥ 40								kPa*s/m <sup>2</sup>	EN 12086
Specific heat capacity	Cp	1030								J/(kgK)	EN ISO 10456
Silicone free	-	No emissions of lacquering disturbing substances								-	-
Designation code	-	MW-EN14303-T2-WS1-CL10								-	EN 14303

Declared material properties are obtained in the production process and ensured by the factory production control in accordance with the European Standard at the time of manufacture.  
Observing storage and handling guidelines will maintain performance within published tolerances.

## Standard formats\*

Thickness	80/ 100 mm
Length	3000/2500 mm
Width	900 mm

\*Other dimensions on request.

## Handling

Knauf Insulation products are easy to handle and easy to install. They are supplied in suitable packaging materials to balance necessary transport protection with sustainable recycling options. Packaging is not designed for long-term storage or exposure to harsh weather conditions. Further product information is mentioned on every pack.

## Storage

For longer-term protection on site we recommend storing the product either indoors or alternatively under a roof cover and off the ground. If covered storage is not available, products can be stored outside (open-air-storage) if placed off the ground (keep palletized) and covered with plastic hood (foil), for a maximum of up to 6 months from the date of delivery. Outdoor storage is not recommended during particularly humid months with large fluctuations in temperature.



Knauf Insulation mineral wool products made with ECOSE® Technology benefit from a formaldehyde-free binder made from rapidly renewable bio-based materials instead of petroleum-based chemicals. The technology has been developed for Knauf Insulation's mineral wool products, enhancing their environmental credentials without affecting the thermal, acoustic or fire performance. Insulation products made with ECOSE® Technology contain no dye or artificial colours – the colour is completely natural.

## Knauf Insulation d.o.o.

Varaždinska 140, 42220 Novi Marof, Croatia

All rights reserved, including those of photomechanical reproduction and storage in electronic media. Extreme caution was observed when putting together and processing the information, text and illustrations in this document. Nevertheless, errors cannot be completely ruled out. The publisher and editors cannot assume legal responsibility or any liability for incorrect information and consequences thereof. The publisher and editors will be grateful for improvement suggestions and details of possible errors pointed out. For the most up-to-date document versions and product information, please always refer to our website.